

Next Generational Firewalls

UBNetDef, Spring 2024

Week 10

Lead Presenter: Ethan Viapiano

Learning Objectives

- Understand how Next Generation firewalls direct traffic.
- Explore Zero Trust and how it can be used.
- Hands on security policy rules in Palo Alto.

Agenda

- Review Firewalls and the OSI model
- Next Generation Firewall Features
- Zero Trust
- Cyber Kill Chain Review
- Interfaces and Zones
- Palo Alto Security Policy

Quick Review

- Firewall Rules
- OSI Model Review
- Network Traffic and Interfaces
- Service Ports and Firewalls

In Class Activity

What really are ports?

Connect to my website!

- ⬡ <http://192.168.13.87>
- ⬡ Why didn't it work?
- ⬡ <http://192.168.13.87:8080>
- ⬡ Why didn't it work?
- ⬡ How do we fix it without dropping the firewall rules?



What makes the Firewall "Next-Gen"?



- The actual features and functionality that the firewall is capable of (or just the buzzword)

	Classic Firewall	Next Generation Firewall
Filter network traffic using port, IP, and protocol	Supported	Supported
NAT	Support	Supported
Deep Packet Inspection	Not Supported	Supported
Intrusion Detection System (IDS) Intrusion Prevention System (IPS)	Not Supported	Supported
LDAP and Active Directory Intergration	Not Supported	Supported
OSI model layers covered	2-4	2-7

OSI Reference Model



TCP/IP Conceptual Layers

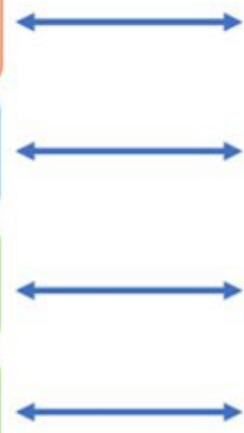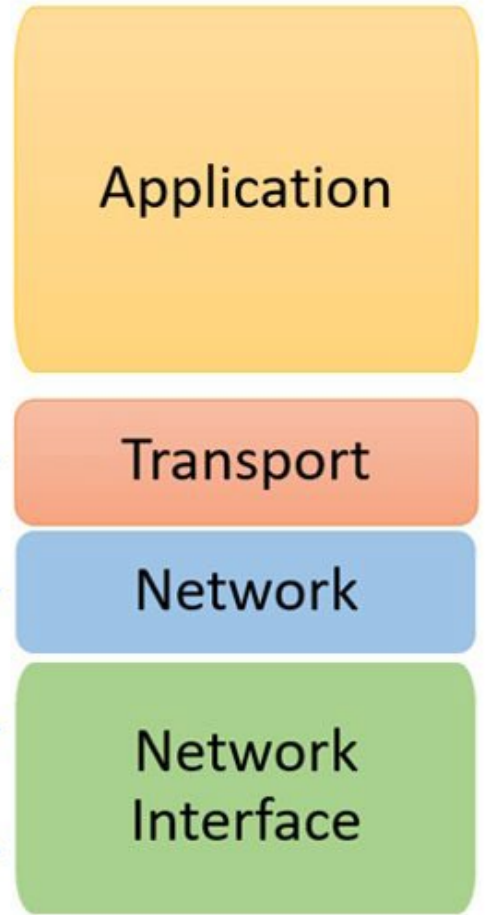

Some popular Next Generation Firewalls:

FORTINET[®]



paloalto
NETWORKS[®]

FORCEPOINT
POWERED BY Raytheon

JUNIPER
NETWORKS[®]

SONICWALL

What's it take to manage a next gen firewall?

- Technical Infrastructure?
- Skillset?
- Governance?

So, what can a next gen firewall do?


- IPS/IDS
- URL Web filtering
- Live threat feeds
- DNS resolution interception
- Detonation of potentially malicious files (Wildfire)
- Web application deep inspection
 - TLS decryption/re-encryption (offloading)
- Live threat maps specific to organization
- Analytics/Dashboarding

Live threat maps specific to organization (Can anyone guess what organization?)



What Zero Trust Architecture Accomplishes?

- Reduces the likelihood of accidental breaches (Worker picks up a hard drive in the parking lot)
- Reduces the likelihood of insider attack
- Reduces the likelihood of successful pivoting
- Ensures that east-west traffic is monitored
- Where have we implemented Zero Trust in this class?
- Where is trust necessary in our current architecture

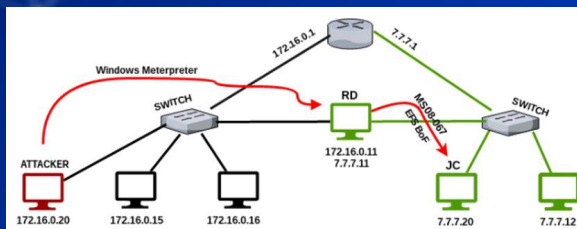


Intra and inter network traffic

- Intra network traffic is traffic within a zone (Win10Client connecting to IISServer)
- Inter network traffic is traffic moving between zones (OutsideDevice connecting to IISServer)


What is wrong on this image?

North-South
Traffic

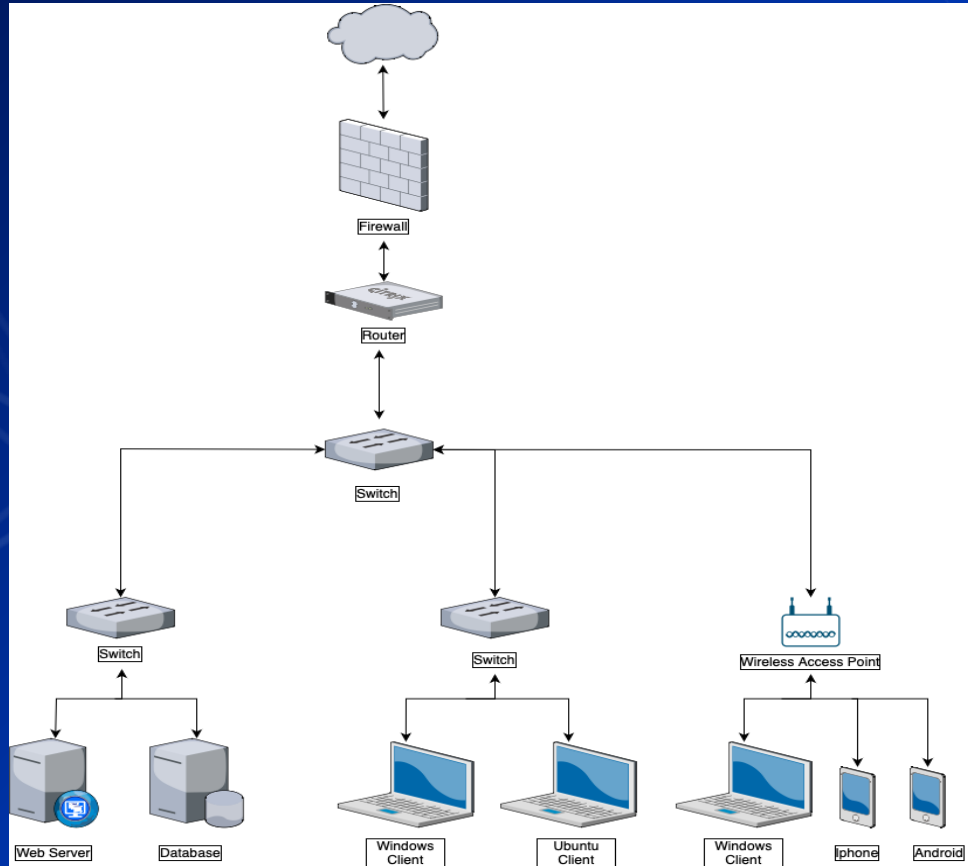


East-West Traffic

What is the Cyber Kill Chain?

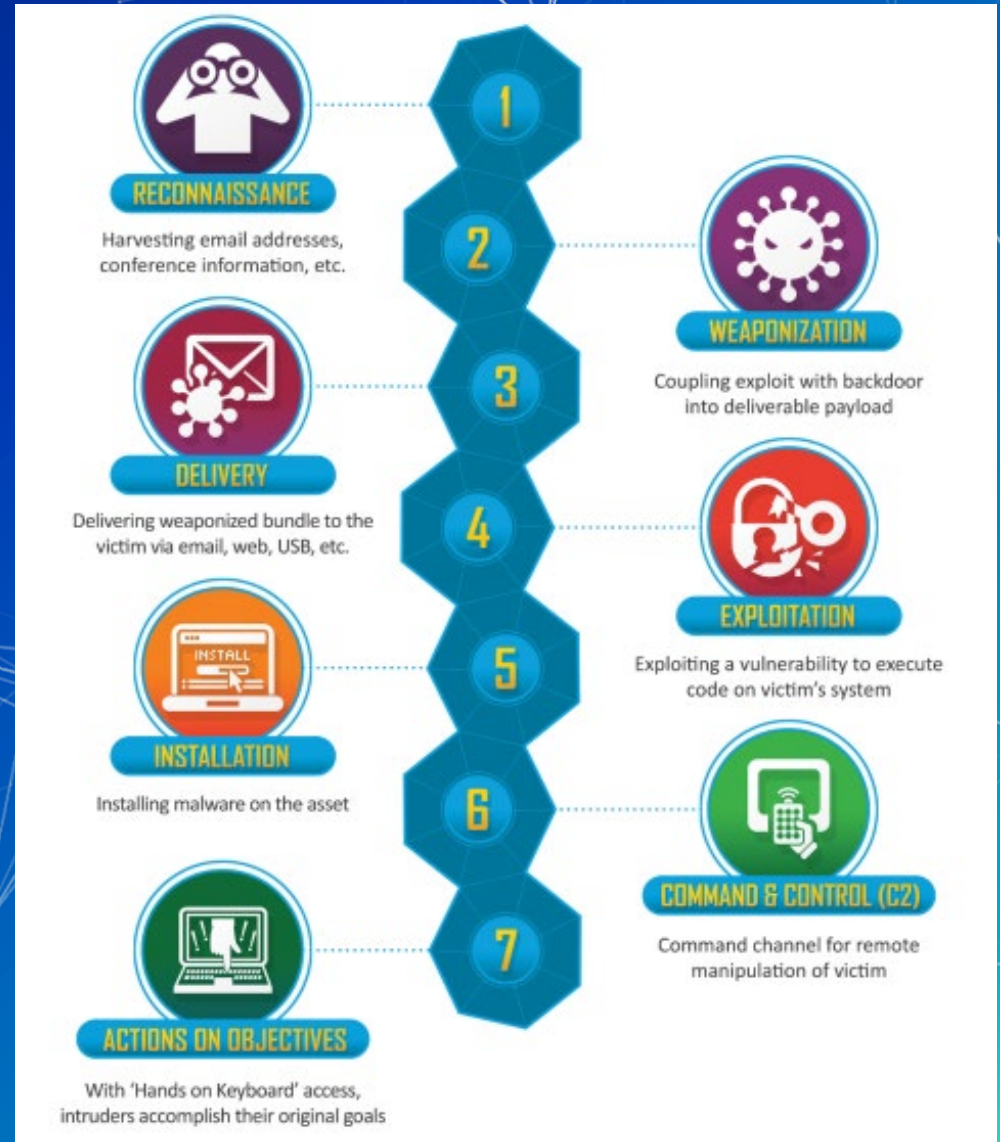

Cyber Kill Chain

At what stages could a next generation firewall be useful?

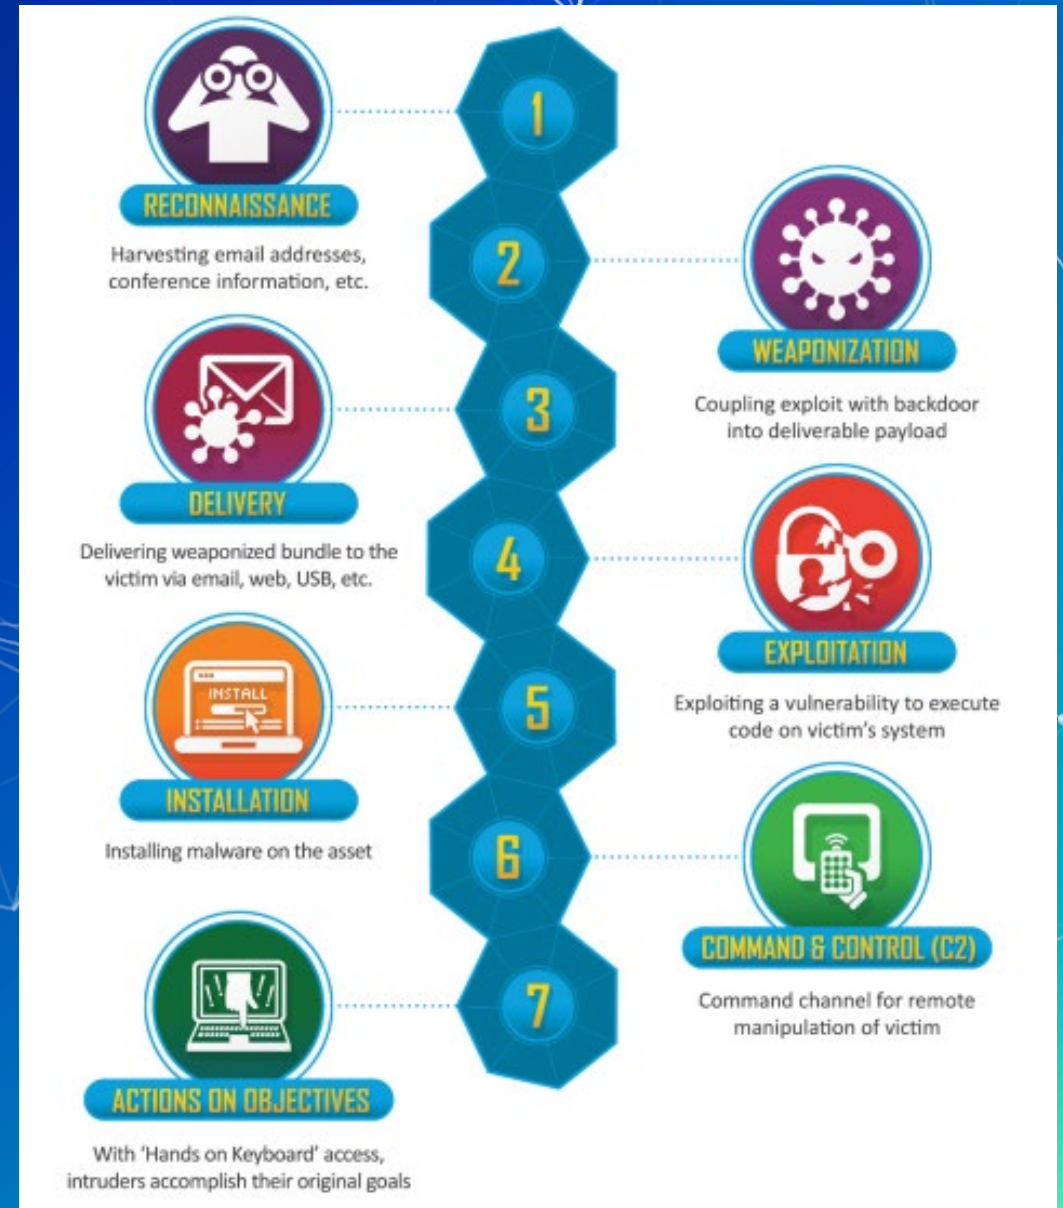

Break slide

Please return in 10 minutes

What are zones and interfaces?

- This will all be *very easy* to understand
- Zones are a logical group of traffic on a network
 - Examples of zones:
 - Adminnet, Servernet, External
 - Zones can have multiple interfaces within them
- Interfaces are physical (or virtual) ports that machines plug into




Logs

- What can be learned from logs?
- What have we logged with pfSense?
- What can Palo log?
 - What are the negatives of network logs?

Application Control Center (ACC) & Palo Panorama

- ACC is an interface that provides you with a nice overview of the network activity.
- Palo Panorama helps manage multiple PaloAlto firewalls

Application	Risk	Bytes	Sess...	Thre...	Cont...	URLs	User
google-base	4	21.2M	17	0	0	0	1
ssl	4	8.6M	62	0	0	0	1
web-browsing	4	57.0k	5	0	0	0	1
dns	4	32.5k	92	0	0	0	1
ntp	2	20.6k	229	0	0	0	1
netbios-ns	2	2.9k	3	0	0	0	2
insufficient-data	1	2.4k	10	0	0	0	2
ping	2	392	2	0	0	0	1

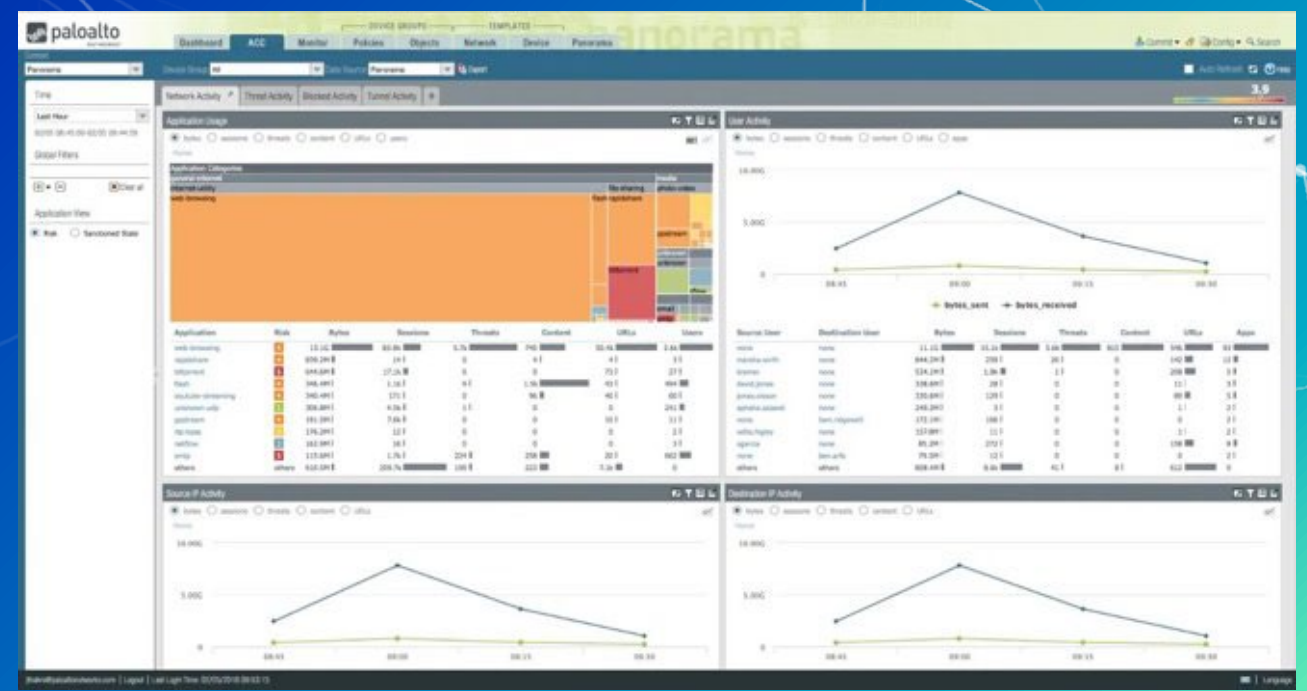

In Class Activity

Security Policy

Candidate Config and Running Config

All the changes you make are saved to the **Candidate Config**. The Candidate Config doesn't enforce the rules you save into it. In order to do that you will need to promote the candidate config to **running config**.

Commit Commit Commit

If unsure what exactly you are committing, see the difference between Candidate Config and Running Config.



Login

Username: `student`

Password: `changeme`

Firewall IP: `https://192.168.8.[130 + X]`

Firewall Username: `admin`

Firewall Password: `Change.me!`

Services = Classical Firewall Rule

App-ID = Next Gen Firewall rule

```
ssh 192.168.13.87
```

```
ssh bandit0@bandit.labs.overthewire.org -p 2220
```

```
http://192.168.13.91
```

```
http://192.168.13.87:8080/
```

How would we only allow google, and nothing else?

Use App-ID google-base

Security Policy Rules

- By default, Palo Alto allows *intrazone* (traffic within the same zone). However, it also blocks *interzone* traffic (traffic between different zones).
- How can these be more effective than the rules we've used in pfSense? (Hint: Remember the activity at the beginning of class)

Security Profiles

- Antivirus Profiles
- Anti-Spyware Profiles
- Vulnerability Protection Profiles
- URL Filtering Profiles
- Data Filtering Profiles
- File Blocking Profiles
- DoS Protection Profiles
- WildFire Analysis Profiles
- Zone Protection Profiles

Homework

- Configure Palo Alto Zones and Interfaces.
- Configure NAT policy.
- Set Security policy to block and allow traffic.